



FREE EXIT BOX

Touch plate sensor for simple exit



FEB100

- Simple To Use
Touch Plate Design
- Built-in Time Delay For Pedestrian Doors
- Rugged Housing With Built-in LED Light

The FEB100 Free Exit Box offers simple exit control through automatic gates and pedestrian doors. It uses a metal touch plate with no moving parts and is housed in a rugged steel housing. The built-in time delay is ideal for applications when the Free Exit Box is placed back from the pedestrian door. And the LED light makes the FEB100 easy to use day or night.






The Free Exit Box offers simple exit control through automatic gates and pedestrian doors. It uses a metal touch plate with no moving parts and is housed in a rugged steel housing.

Free Exit Box

Rugged Outdoor Touch Plate Box


Model	Design	Relay
FEB100	Touch Plate Sensor	NO, NC, C

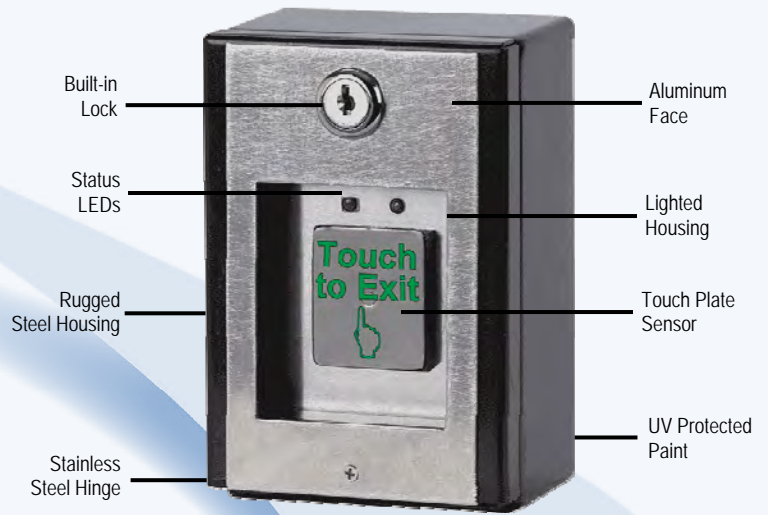

Features:

- Simple to use touch plate with no moving parts
- Lighted, recessed design for easy nighttime use.
- LED housing light offers low power consumption lighting.
- Built-in relay time delay is ideal for pedestrian doors and walk gates.
- Single relay offers NO, NC and C output for use with gate operators, electric strikes, and magnetic locks.
- Red LED power indicator on front of unit.
- Green LED relay activation indicator on front of unit.
- Built-in buzzer for audible feedback when system is activated. Simple to disconnect if not desired.
- Internal touch pad for simple field testing.
- Stainless steel hinged door.
- Built-in lock for easy service access.
- Brushed aluminum faceplate for clean look.
- UV Protected powder coat paint.
- Rugged weather tight, vandal resistant design.
- Locked and hinged faceplate for easy service access.
- 12-24 VAC or VDC to work with a wide range of transformers, gate operators, and other power sources.

Specification	FEB100
Sensor design	Touch plate
Buzzer	Internal - Can be disconnected
Power LED	Red - On faceplate
Activation LED	Green - On faceplate
Time delay adjustment	1-99 seconds
Relay functions	Momentary
Number of relays	1
Relay outputs	NO, NC, C
Housing light	White LED
Hinge	Stainless steel
Conduit hole - Back	3/4" centered on back of box
Mounting holes	3" x 3" centered 3" vertical
Power Input	12-24 VAC/VDC
Dimensions	6"H x 4"W x 3"D



! DO NOT mount operating devices accessible through the gate or in between gate and wall.

! Mount the system at least 10 feet away from a vehicular gate and its travel.