



WVD-S200P



Quick Reference



- Installation Instructions

Read and follow all UL and Safety Standards before installing. Refer to the manual and qualified personnel for assistance. DO NOT install this device unless all entrapment and pinch points are eliminated.

ASSEMBLING THE SENSOR:

The sensor consists of a battery, PCB, antenna ring, and antenna. To assemble the S200P:

1. Place the battery at the bottom of the housing with the wire leads at the top of the battery.
2. Using the long grooves, slide the circuit board (PCB) into the housing. The battery connector should be at the bottom and the learn button at the top.
3. Slide the antenna ring over the antenna. The lip on the ring should be on the bottom so the antenna rests on it.
4. Gently fold the antenna wire and place the antenna in the antenna ring on top. The antenna should be resting on the lip

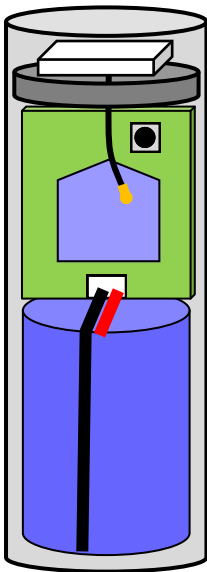

Antenna Top View:

Antenna Ring goes in first. Antenna sits on top of ring edge to prevent antenna from rocking or sliding to the side of the circuit board.



WARNING!

- Protect against all pinch & entrapment points. **If entrapment points are not protected, DO NOT install this product.**
- This device is intended for vehicular traffic only. Keep all pedestrian traffic including bicycles away